


light-tec
be bright. save energy.



**OJO DE BUEY
EMPOTRABLE**
6 watts

Guatemala, Guatemala
Teléfono: (+502) 2462-6880/81

www.light-tec.com.gt



light-tec
be bright. save energy.

OJO DE BUEY EMPOTRABLE 6 WATTS

Voltaje: AC100-240V 50/60Hz
Consumo: 6 Watts
Corriente: 108-58mA
Ángulo: 120°
Eficiencia: 75 lm/w
Lumens: 450 lm / 480 lm
Color: 3,000k / 6,000k
Factor de Potencia: ≥ 0.5
Grado de protección: IP20
Temperatura de trabajo: -10°C a 45°C
CRI: ≥ 80
No dimerizable

25,000hrs

LED



Temperatura de Color



3000K
Luz Cálida




6000K
Luz Blanca

EQUIVALENCIA



Ahorro hasta un 60%



33mm

Ø 120mm

DIÁMETRO PERFORACIÓN: Ø 105mm


Residencial Comercial Oficinas




FOTOMETRIA LUMINARIA

DATA OF LAMP		Imax (cd)	157.4	S/MH (C0/180)	1.19
MODEL		EFFICIENCY (%)	100.0	S/MH (C90/270)	1.23
NOMINAL POWER (W)	6	TOTAL FLUX (lm)	445.31	Voltage (V)	221.0
RATED VOLTAGE (V)	222	EFFICIENCY (lm/W)	79.0	Current (A)	0.049
NOMINAL FLUX (lm)	445.3	☒ up (%)	0.3	Power (W)	5.640
LAMPS QUANTITY	1	☒ down (%)	99.7	Power Factor (PF)	0.515
TEST VOLTAGE (V)	221.0	Effictive Flux (lm)	0.0	EEL	0.000


LUMINOUS INTENSITY DISTRIBUTION

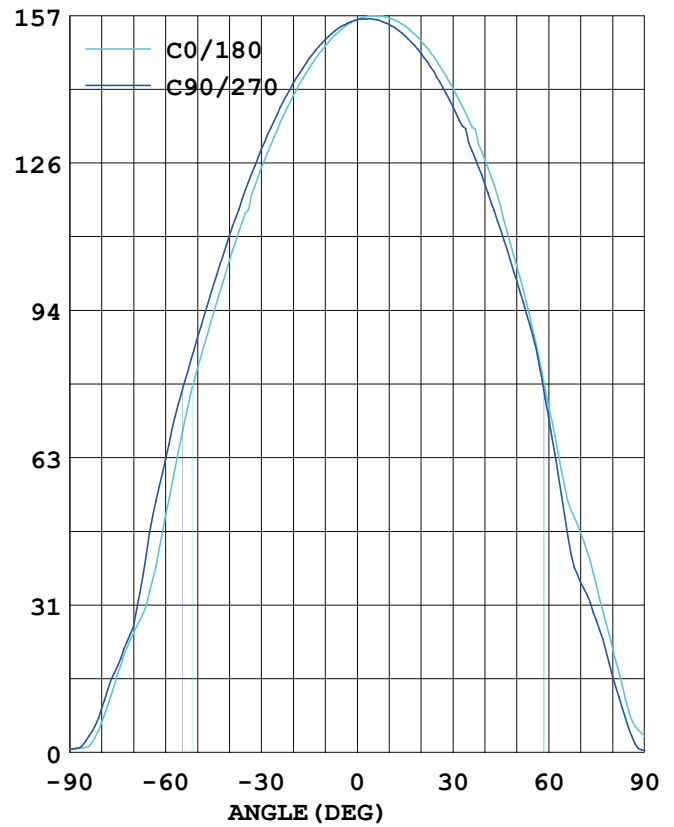

LUMINOUS INTENSITY DISTRIBUTION

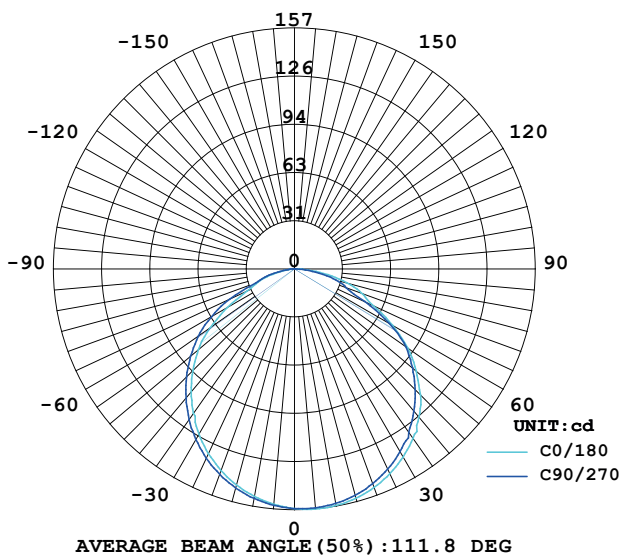


CONO LUMINICO

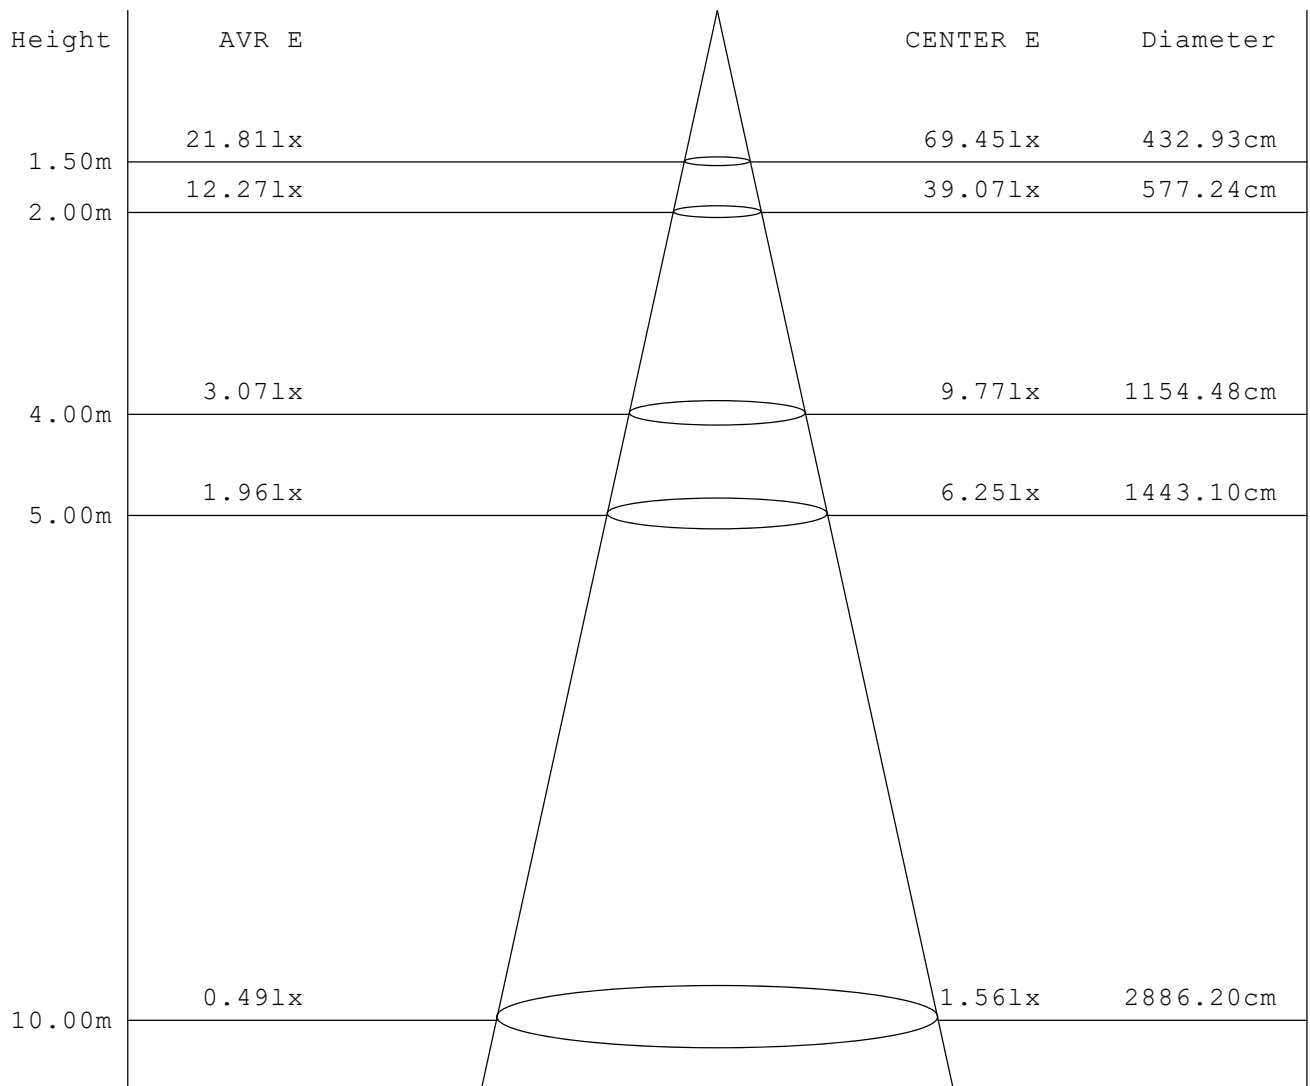

Angle: 110.6deg

ISOCANDELA CURVE OF LAPM

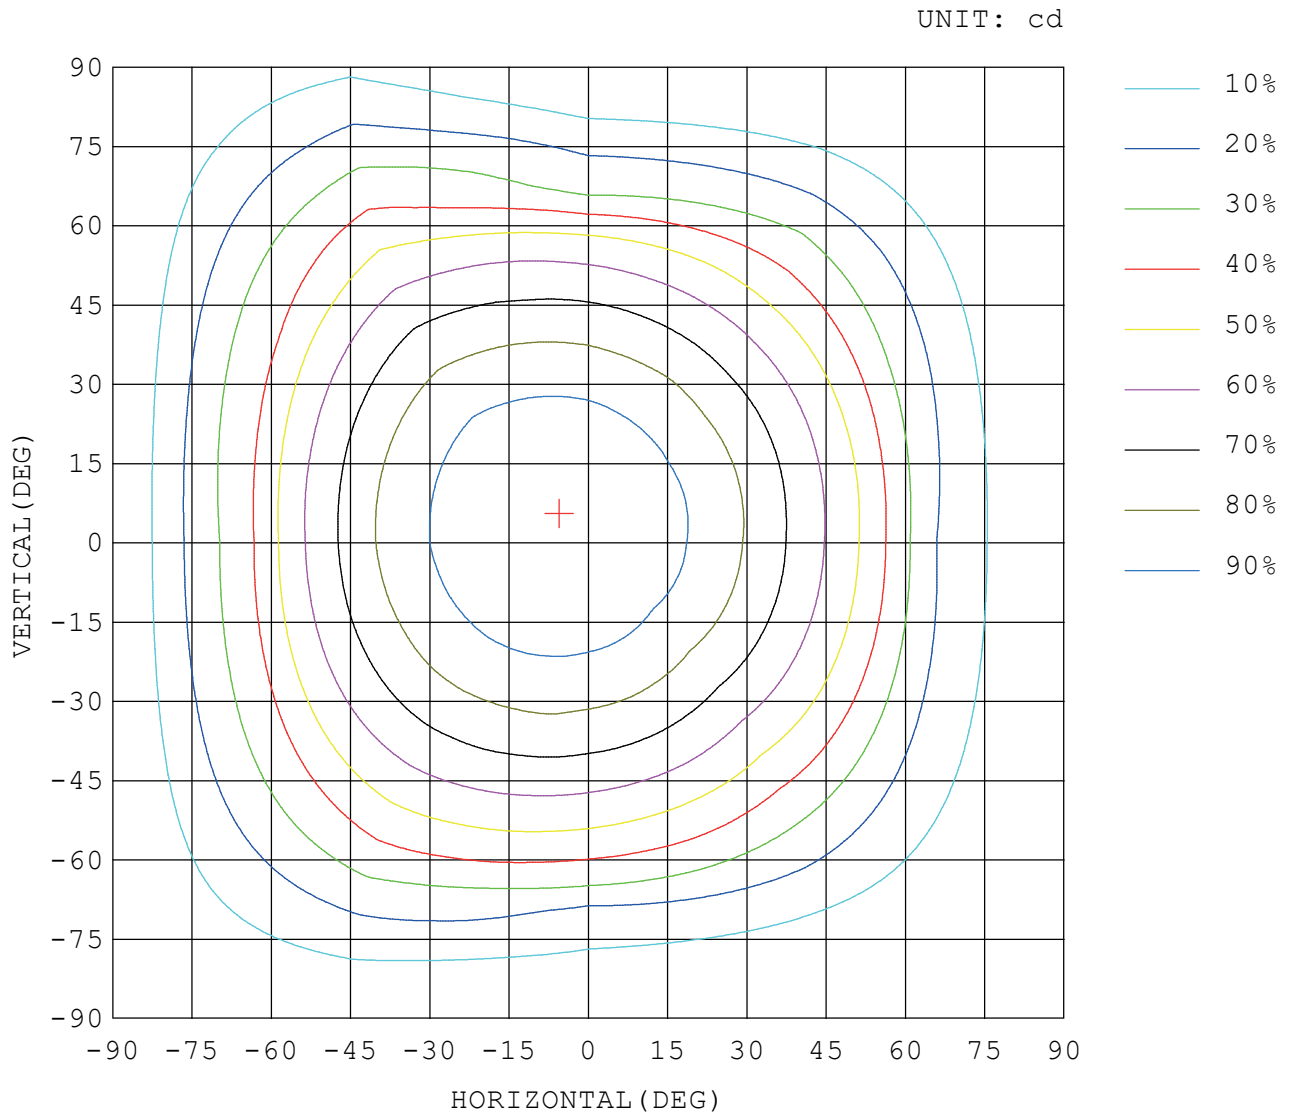

ISOLUX DIAGRAM

